

COMMERCIAL ENERGYSAVER™



CHOOSE YOUR OPTIONS

INSULATION	3-Inch EnergySaver™	2-Inch EnergySaver™
Foam/Insulate	Extruded closed-cell polystyrene	Polystyrene
R-Value	17.05	9.25
U-Factor (Btu/hr/ft ² /F)	0.145	0.220
Thickness	3 inches	2 inches
Maximum Width	40 ft. 2 In.	24 ft. 2 in.
Exterior Steel	25 gauge <i>20 gauge upgrade, white only</i>	25 gauge <i>20 gauge upgrade, white only</i>
Interior Steel	25 gauge	25 gauge
Warranty* Excludes Springs	10 years	10 years

*For full warranty details contact your Midland dealer



COLORS




*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.

WINDOWS



GLASS

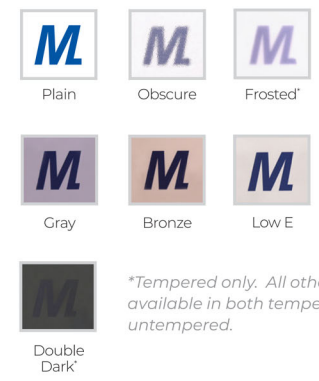

*Tempered only. All other glass is available in both tempered and untempered.

TRACK MOUNTING



TRACK CONFIGURATIONS

